



**LIGHTING & ELECTRICAL
PRODUCTS GROUP**


P18120 & P18122

Swivel Control



Dimensions

Width (D)	1.3" (33mm)
Depth (B)	3.9" (99mm)
Height (A)	1.8" (46mm)

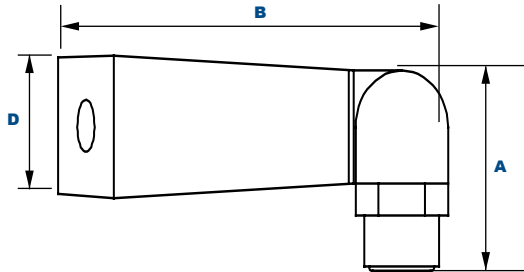

Sensors & Accessories Series

Control Passage, Street & Doorway Lighting Automatically in Accordance with the Ambient Lighting Level.

Features:

- Convenient Directional Control
- Raintight For Outdoor Use
- 6" (152mm) Leads, AWG#16, AWM3321, 150°C
- Thermal Switch
- UV-Stabilized Polycarbonate Enclosure & Eye
- 1/2" CdS Photocell
- 1/2" Thread Nipple with Rubber Gasket & Zinc Alloy Lock-Nut
- Swivels 0-200°

Electrical Specifications:

- Input Voltage: 110-130VAC (P18120)
208-277VAC (P18122)
- On-Off Levels: 10~20Lx On(Dusk)
30~60Lx Off(Dawn)
- Ambient Temperature: -40°F ~ +158°F
- Relative Humidity: 96%
- Power Consumption: 1.5VA Max.
- Electrical Life: 6500 Cycles
- Tungsten: 1800w
- Ballast: 1100VA
- Listing: C-ETL-US Listed

Specifications subject to change without notice. Rev. 021320