

SPECIFICATION SHEET

IT3000CE




3 1/2" 3000 Series

Shallow Remodel Housing with Electronic Converter


SPECIFICATIONS

HOUSING DETAILS	Up to 18 gauge or 0,051" (1,3 mm) thick galvanized steel housing. Junction box can support up to 10 – 14 gauge wires or 8 – 12 gauge wires. Below-ceiling accessible.		
MOUNTING	Cutout diameter: Ø 3 5/8" (92 mm) Can fit in ceilings up to 7/8" (22 mm) thick. Requires a 3 7/8" (98 mm) clearance beyond the ceiling level. Patented hook (PAT#CAN 2,088,648 and #USA 5,377,088) for ease of installation and a perfect fit to ceiling. No light leakage.		
LAMP	MR16 37W MAX This product was designed for MR16 halogen lamps. If you want to use the dimming option and you replace the MR16 lamp by an equivalent LED lamp, please see dimmer compatibility list on our Website.		
VOLTAGE	IT3000CE: 120 VOLTS (CAN & USA) IT3000CE2: 277 VOLTS (USA)		
ELECTRONIC CONVERTER	Electronic Converter IT3000CE 120V / 12V IT3000CE2 277V / 12V		
COMPATIBLE TRIMS	35W MR16 T3000 T3125 T3200	T3250 T3260 T3300	37W MR16 R3450D R3470 R3470D T3145DG T3250DG
CERTIFICATION	cULus E174023 for damp locations		
WARRANTY	3 year warranty on converter and 5 years on the socket.		

Project	
Notes	
Fixture Type	
Date	

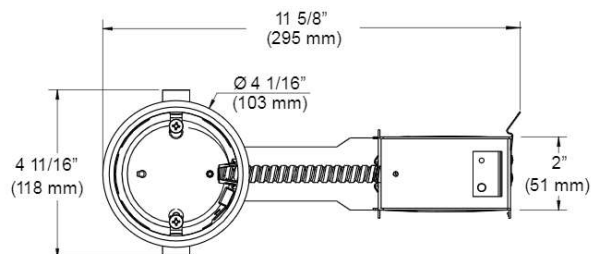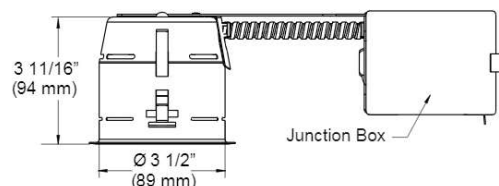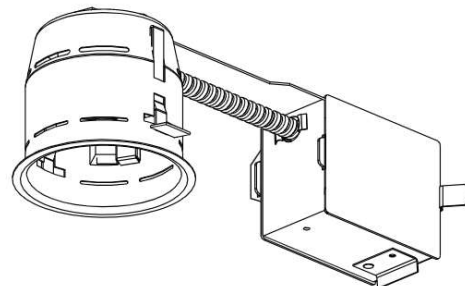

CODIFICATION EXAMPLE



ORDERING CODE

MODEL	SERIES	HEIGHT HOUSING	CONVERTER	VOLTAGE
IT	3000	C	E	
IT Remodel	3000 3 1/2" Series	C Short Housing	E Electronic (120/277V)	... 120 Volts 2 277 Volts

