


ORDERING INFORMATION

Order code: 63735
 Description: LED/A15/7W/30K/F/STD
 UPC: 69549637351
 Case quantity: 48

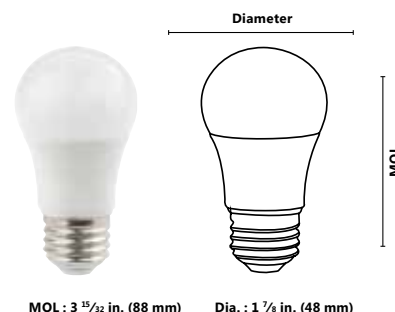

PERFORMANCE DATA

Shape:	A15
Base:	E26
Wattage (W):	7
Lamp voltage (VAC):	120
Colour temperature (K)**:	3 000
Average life (L70 hours):	25 000
Initial lumens (lm)*:	514
Initial lumens per watt (lm/W):	73
CRI:	82
Beam angle:	299
Power factor:	0.97
Operating temperature range:	- 20 °C / - 4 °F to 50 °C / 122 °F

*Initial lumens range: +/- 5 %

**Typical colour temperature range: +/- 5 %



DIMMABLE

DAMP

NO
MERCURY

COMPLIANT

WARRANTY

4002596

COMPATIBLE DIMMER LIST

Leviton: 6674
 Lutron: DVCL-153P, CTCL-153P, MACL-153P, AYCL-253P

CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electric shock – do not use where directly exposed to water or weather.
- Not for use in completely enclosed recessed fixtures.
- Suitable for use in damp locations.
- Added weight of the device may cause instability of a free-standing portable luminaire. Use only with a portable table lamps in which the distance from the bottom of the base to the top of the lamp holder does not exceed three (3) times the minimum base diameter.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60 Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- The lamp may not be compatible with all dimmers, visit www.standardpro.com to find up-to-date dimmer compatibility information.
- 3 Years Limited Warranty.
- Visit www.standardpro.com for consumer complaint resolution and toll-free numbers.
- Operating temperature: - 20 °C / - 4 °F to 50 °C / 122 °F.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

October 22, 2015

STANDARD[®]