

ORDERING INFORMATION


Order code: 63734
 Description: LED/A15/7W/27K/F/STD
 UPC: 69549637344
 Case quantity: 48

PERFORMANCE DATA

Shape: A15
 Base: E26
 Wattage (W): 7
 Lamp voltage (VAC): 120
 Colour temperature (K)**: 2 700
 Average life (L70 hours): 25 000
 Initial lumens (lm)*: 507
 Initial lumens per watt (lm/W): 72
 CRI: 82
 Beam angle: 298
 Power factor: 0.97
 Operating temperature range: - 20 °C / - 4 °F to 50 °C / 122 °F

*Initial lumens range: +/- 5 %

**Typical colour temperature range: +/- 5 %

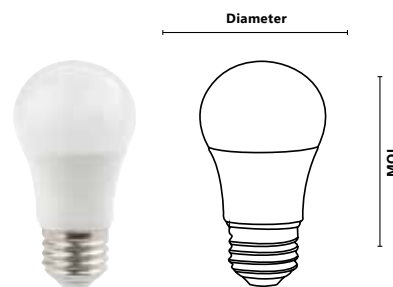

MOL : 3 ¹⁵/₃₂ in. (88 mm)

Dia. : 1 ⁷/₈ in. (48 mm)



COMPATIBLE DIMMER LIST

Leviton: 6674
 Lutron: DVCL-153P, CTCL-153P, MACL-153P, AYCL-253P

CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electric shock – do not use where directly exposed to water or weather.
- Not for use in completely enclosed recessed fixtures.
- Suitable for use in damp locations.
- Added weight of the device may cause instability of a free-standing portable luminaire. Use only with a portable table lamps in which the distance from the bottom of the base to the top of the lamp holder does not exceed three (3) times the minimum base diameter.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60 Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- The lamp may not be compatible with all dimmers, visit www.standardpro.com to find up-to-date dimmer compatibility information.
- 3 Years Limited Warranty.
- Visit www.standardpro.com for consumer complaint resolution and toll-free numbers.
- Operating temperature: - 20 °C / - 4 °F to 50 °C / 122 °F.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

October 22, 2015

STANDARD[®]