


TECHNICAL INFORMATION BULLETIN

LED RETROFIT LAMPS



Ordering Information

Order code: 60916
 Description: LED/GU10/3.5W/FL/30K/120V/35M/38/STD
 UPC: 69549609167
 Case Qty: 24

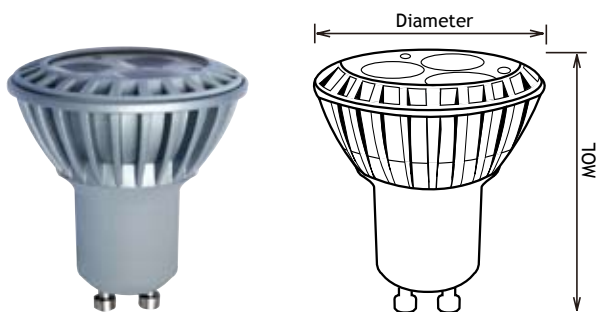

Performance Data

Initial lumens (lm)*:	170
Initial lumens per watt (lm/W):	49
Wattage (W):	3.5
Lamp voltage (VAC):	120
Colour temperature (K)**:	3 000
CRI:	80
Average life (hours):	35 000
CBCP (cd):	300
Power factor:	>0.5
Operating temperature range:	-40°C / -40°F to 40°C / 104°F

* Initial lumens range +/- 5%

** Typical colour temperature range +/- 5%

Physical data / Requirements

Shape:	ES16
Base:	GU10
MOL mm (in.):	56 (2 7/32)
Diameter mm (in.):	50 (1 31/32)

Features and Benefits

- Long service life
- Direct replacement for traditional light sources
- Energy efficient
- Reduced maintenance and energy costs
- Provides cool light free from UV emissions and mercury
- Instant-on light
- Shock and vibration resistant



Cautions

- Turn power off before inspection, installation, or removal
- Use only in fixtures listed by a nationally recognized electrical testing organization for use with this lamp
- Not for use with dimmers
- Suitable for use in open fixtures

NOTES:

- This device complies with Part 1B of the FCC rule. This product may cause interference with other devices. If interference occurs, change the location of the products involved. This RFLD device complies with Canadian ICES-003.
- LED lamps must be stored, installed and operated under suitable environmental conditions and in accordance with, but not limited to, the latest National Electrical Code, cETLus, CSA and ANSI specifications.

Risk of electric shock - Do not use where directly exposed to water. This device is not intended for use with emergency exit fixtures or emergency lights.

NOT FOR USE WHERE EXPOSED TO THE WEATHER

Do not open - no user serviceable parts inside.

