

TECHNICAL INFORMATION BULLETIN

ELECTRONIC LINEAR FLUORESCENT BALLAST

PROGRAM RAPID START T12

ORDERING INFORMATION

Order code: 10332
 Description: E260T12PRS120/N/HO
 UPC: 69549103320
 Warranty: 5 years


GENERAL INFORMATION

Ballast type: Electronic
 Starting method: Program Rapid Start
 Lamp connection: Parallel
 Input voltage: 120V
 Input frequency: 60HZ
 Max. case temp.: 75 °C
 Status: Active
 Safety approval: 10332STD




Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD %	Power factor	Max. lamp current crest factor	B.E.F.
F48T12HO	2	60	14/-10	0.89	106	0.85	10	0.99	1.7	0.80
F48T12HO	1	60	14/-10	0.54	65	0.91	10	0.99	1.7	1.40
F36T12 HO	2	50	14/-10	0.81	97	0.86	10	0.99	1.7	0.89
F36T12HO	1	50	14/-10	0.44	53	0.93	10	0.99	1.7	1.75
F24T12HO	2	35	14/-10	0.56	68	0.88	10	0.99	1.7	1.29
F24T12 HO	1	35	14/-10	0.32	38	0.95	15	0.99	1.7	2.50
F72T12HO	1	85	14/-10	0.66	78	0.75	10	0.99	1.7	0.96
F60T12HO	1	75	14/-10	0.6	72	0.82	10	0.99	1.7	1.14
F40T8	1	40	14/-10	0.6	72	1.21	10	0.99	1.7	1.68
58WT8	2	58	14/-10	0.97	115	0.92	10	0.99	1.7	0.80
58WT8	1	58	14/-10	0.53	64	1	10	0.99	1.7	1.56
70WT8	1	70	14/-10	0.61	73	0.85	10	0.99	1.7	1.16

WIRING DIAGRAM

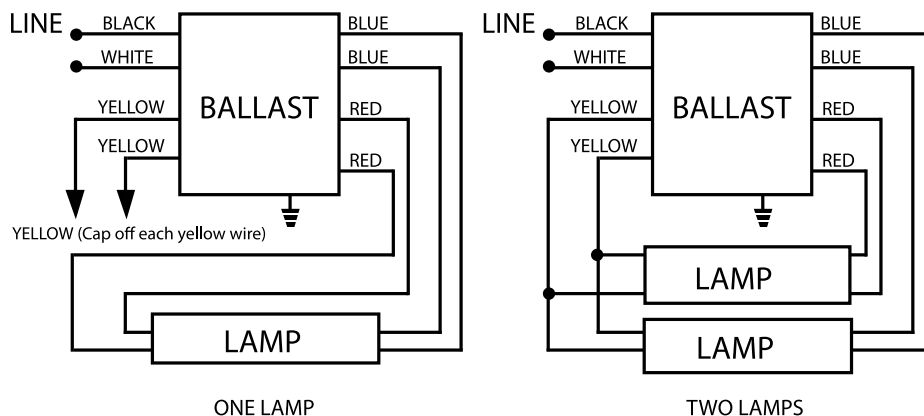

TECHNICAL INFORMATION BULLETIN ELECTRONIC LINEAR FLUORESCENT BALLAST PROGRAM RAPID START T12

LEAD LENGTHS			BALLAST FEATURES			
Lead colour	in	cm	Length (L)	Width (W)	Height (H)	Mounting (M)
Black	31	40.6	24.1 cm	5.9 cm	3.7 cm	22.6 cm
White	16	40.6	9.5 in	2.33 in	1.46 in	8.9 in
Blue	31	78.7				
Red	46	78.7				
Yellow	16	116.8				
Blue/White	31	78.7				

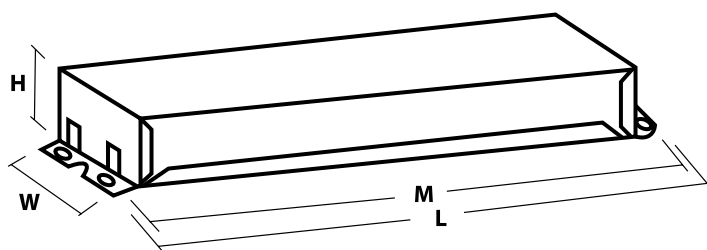

WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C. For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.