


# Technical Information Bulletin - LED

# LED FILAMENT

## ORDERING INFORMATION

Order code: 64271  
Description: LED/B11/5W/27K/E12/FIL/STD  
UPC: 69549642713  
Case quantity: 80

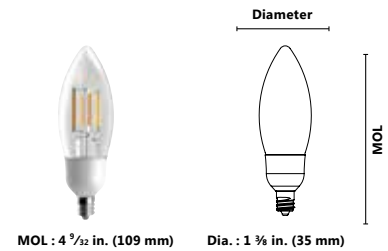

## PERFORMANCE DATA

Shape: B11  
Wattage (W): 5  
Lamp voltage (VAC): 120  
Finish: Clear  
Colour temperature: 2 700 K  
Average life: 15 000  
Initial lumens (lm)\*: 450  
Initial lumens per watt (lm/W): 90  
Incandescent equivalent: 60  
CRI: 80  
Beam angle: 320°  
Power factor: >0.7  
Operating temperature range: -20 °C/-4 °F to 40 °C/104 °F  
Base: E12  
Burning position: Universal

\*Initial lumens range: +/- 5 %

\*\*Typical colour temperature range: +/- 5 %



<sup>1</sup> Based on an average daily usage of 3 hours.

## COMPATIBLE DIMMER LIST

**Cooper** DAL06P, SAL06P, SLC03P, AAL06

**Legrand** HCL453P

**Leviton** IPL06, 6674, DSM10-1LZ

**Lutron** DVCL-153P, CTCL-153P, MACL-153P, AYCL-253P, DVCL-253P, DVELV-300P, SELV-300P, NTELV-600

## CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electric shock – do not use where directly exposed to water or weather.
- Suitable for use in open fixtures.
- Suitable for use in dry locations.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60 Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Compatible with most dimmers.
- Five year limited warranty.
- For complete dimmer compatibility and warranty information visit [www.standardpro.com](http://www.standardpro.com).
- Operating temperature: -20 °C / -4 °F to 40 °C / 104 °F.

NOTES: This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment. This RFLD device complies with Canadian ICES-003. LED lamps must be stored, operated under suitable environmental conditions and in accordance with, but not limited to, the latest National Electrical Code, cETLus, cULus, CSA and ANSI specifications.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

December 24, 2015

**STANDARD**<sup>®</sup>