

TECHNICAL INFORMATION BULLETIN

CERAMIC METAL HALIDE

CERA^APRO™

Ordering Information

Order code: 59998
 Description: CMH70ED17/830/E26/CL/STD
 UPC: 069549599987
 Case quantity: 6




Performance Data

Initial lumens (lm): 6 200
 Mean lumens (lm): 5 270
 Initial lumens per watt: 89
 Wattage (W): 70
 Lamp voltage (V): 90
 Colour temperature (K): 3 000
 CRI: 85
 Average life (hrs): 16 000
 Warm up time to 90% (min): < 2
 Hot restart time to 90% (min): < 10
 Burn Position: Universal




Physical data / Requirements


Shape: ED17
 Base: E26
 Finish: Clear
 Luminaire rating: Enclosed
 ANSI code: C139/C98/C143
 MOL (mm): 138
 Diameter (mm): 54
 LCL (mm): 86
 LEED-EB MR Credit: 38
 (Picograms Hg per mean lumen hour)

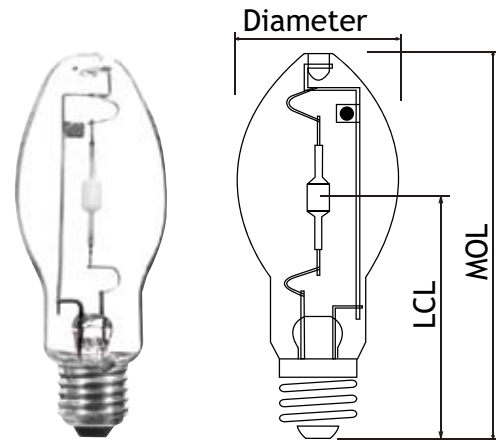

Spectral distribution

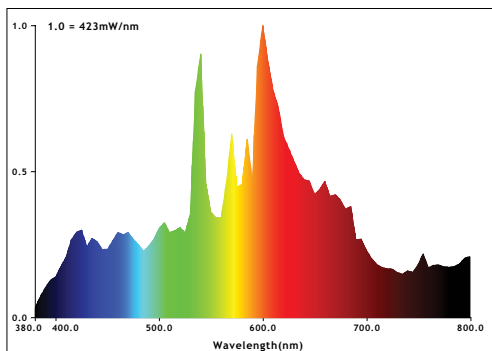

Lumen maintenance

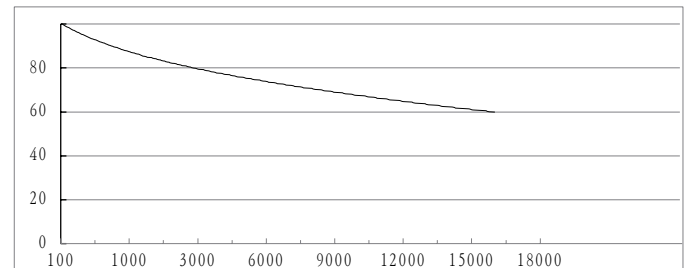

Warning

“R” **WARNING:** this lamp can cause serious skin burn and eye inflammation from shortwave ultraviolet radiation if the outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available. Complies with USA Federal Standard 21 CFR 1040.30 and Canada Standard SOR/80-381.

