

ORDERING INFORMATION


Order code: 10510
 Description: F30T8/CW/PH/G13/STD
 UPC: 69549105102
 Case quantity: 48




PERFORMANCE DATA

Shape: T8
 Base: G13 (Med Bipin)
 Starting method: Preheat Start (PH)
 Wattage (W): 30
 Colour temperature (K): 4 100
 CRI: 62
 Rated life on IS¹ ballast:
 Based on a 3 hour start 6 000
 Based on a 12 hour start 7 500
 Initial lumens (lm): 2 180
 Mean lumens (lm): 2 049
 Nominal efficiency (lm/W): 73
 TCLP compliant: Yes
 Phosphor composition: Triphosphor
 Nominal lamp operating frequency (Hz): 60
² Minimum starting temperature (°C): -10

DIMENSIONS

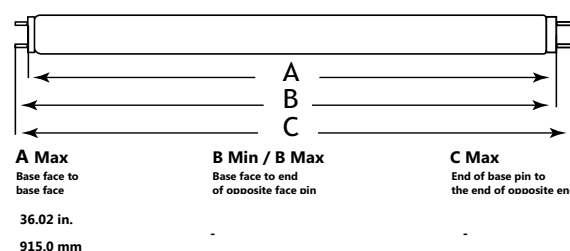

SPECTRAL DISTRIBUTION

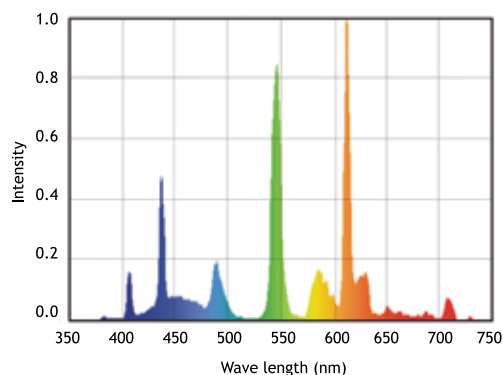

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T8 ballast.

