


## ORDERING INFORMATION

Order code: 63736  
 Description: LED/G16.5/3W/27K/E12/STD  
 UPC: 69549637368  
 Case quantity: 48

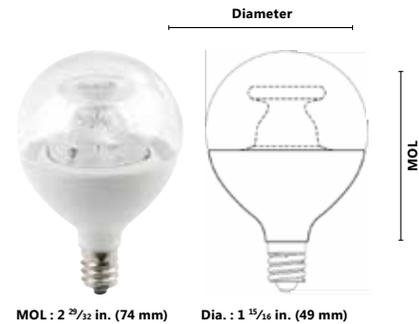

## PERFORMANCE DATA

Shape:	G16.5
Base:	E12
Wattage (W):	3
Lamp voltage (VAC):	120
Colour temperature (K)**:	2 700
Average life (L70 hours):	25 000
Initial lumens (lm)*:	200
Initial lumens per watt (lm/W):	67
CRI:	80
Beam angle:	260
Power factor:	0.9
Operating temperature range:	- 20 °C / - 4 °F to 50 °C / 122 °F

\*Initial lumens range: +/- 5 %

\*\*Typical colour temperature range: +/- 5 %



## COMPATIBLE DIMMER LIST

<b>Adriani:</b>	AY600
<b>Legrand:</b>	HCL453P
<b>Commercial Systems:</b>	QSG-6P, LP-RPM-4A-12
<b>Diva:</b>	DVCL-153P, DVCL-153P
<b>Homeworks:</b>	HW-RPM-4A-120, HxD-6ND
<b>Interfaces:</b>	PHPM-WBX
<b>Radio Ra:</b>	RRD-10ND
<b>Stanza:</b>	SZ-6ND
<b>Lutron:</b>	SZ-6ND, HxD-6ND, S-600PRWH, DV-600PR-WH, TG-600PR-WH, AY600P, Q600P, GL600, DV-603PG, S-600, S-600P, D-600PH, TT-300NLH, TG-603PG, DV-600PR-WH

## CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electric shock – do not use where directly exposed to water or weather.
- Not for use in completely enclosed recessed fixtures.
- Suitable for use in damp locations.
- Added weight of the device may cause instability of a free-standing portable luminaire. Use only with a portable table lamps in which the distance from the bottom of the base to the top of the lamp holder does not exceed three (3) times the minimum base diameter.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60 Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- The lamp may not be compatible with all dimmers, visit [www.standardpro.com](http://www.standardpro.com) to find up-to-date dimmer compatibility information.
- 3 Years Limited Warranty.
- Visit [www.standardpro.com](http://www.standardpro.com) for consumer complaint resolution and toll-free numbers.
- Operating temperature: - 20 °C / - 4 °F to 50 °C / 122 °F.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

October 22, 2015

**STANDARD**<sup>®</sup>