

## ORDERING INFORMATION

Order code: 56501  
 Description: F30T8/830HL/ES  
 UPC: 69549565012  
 Case quantity: 25




Nominal length : 48 in. (915 mm) Dia. : 1 in. (26 mm)


## PERFORMANCE DATA

Shape: T8  
 Base: G13 (Med Bipin)  
 Starting method: Rapid Start (RS)  
 Wattage (W): 30  
 Colour temperature (K): 3 000  
 CRI: 86  
 Rated life on IS<sup>1</sup> ballast:  
     Based on a 3 hour start 24 000  
     Based on a 12 hour start 30 000  
 Rated life on PS/PRS<sup>1</sup> ballast:  
     Based on a 3 hour start 40 000  
     Based on a 12 hour start 42 000  
 Initial lumens (lm): 2 850  
 Mean lumens (lm): 2 700  
 Nominal efficiency (lm/W): 95  
 TCLP compliant: Yes  
 Phosphor composition: Triphosphor  
 Nominal lamp operating frequency (Hz): 60  
<sup>2</sup> Minimum starting temperature (°C): -10

## DIMENSIONS

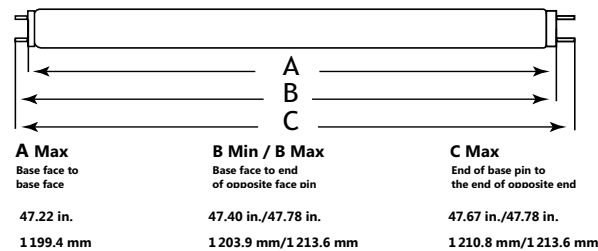

## SPECTRAL DISTRIBUTION

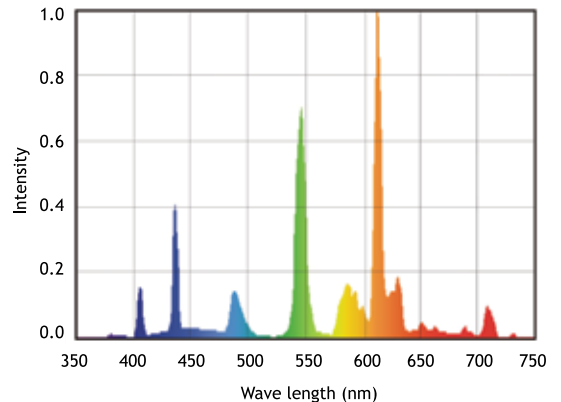

<sup>1</sup> The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

<sup>2</sup> The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T8 800 series ballast.



**E** Means this bulb meets federal minimum efficiency standards.