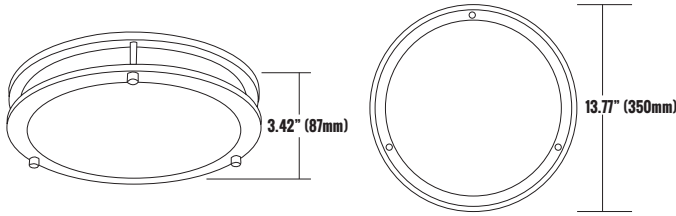


CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

**PRODUCT CODE: CM314-251BNPS4D**
**LED FLUSHMOUNT/14 INCH SPILL RING/LOW PROFILE**


## PRODUCT DESCRIPTION

The Etlin-Daniels next generation, CM314-251BNPS4D, LED spill ring flush mount lighting excel in style, performance and value. From homes to hotels, restaurants to office spaces, these competitively-priced LED fixtures bring remarkable energy savings and uniform illumination to a wide range of residential and commercial applications. Ideal for use in closets, foyers, hallways, corridors, bedrooms, offices, utility work areas, stairways and much more.

- Versatile style low-profile, transitional design
- Installer-friendly, compatible with all standard outlet boxes
- Peace-of-mind, long life output eliminates routine maintenance
- Perfect for 24/7 applications
- Instant on, AC-driven LED boards have zero inrush current

## FEATURES

- High-efficiency, LED low profile fixture
- Indoor use Fixture
- Diffuser easily removes for installation and maintenance
- Equivalent to 3x60W
- 10-100% Triac Dimming with leading Triac Dimmers
- Driving Circuit prevents inrush current from harming dimmer switch and module
- Low profile, only 3.5" assembled height
- 50,000hr of fixture life/L70
- Energy Star approved
- Fixture Finish- Brushed Nickel • Fixture Diffuser- Polystyrene
- 5 year limited warranty


## PRODUCT SPECIFICATIONS (OPTICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	BEAM ANGLE	CRI	SYSTEM EFFICIENCY	VOLTAGE	POWER FREQ.	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
SEOUL 3030	20 CHIPS	68LM/W	1700LM	4000K	120°	>80CRI	>85%	AC120V	50~60HZ	>81%	>0.95	<20%

## PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

## PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
25W	STEEL/PS	>50,000 HOURS	-20°C~+80°C -4°F~+176°F	-20°C~+40°C -4°F~+104°F	13.7 x 3.42 inches (350 x 87 mm)	18.11 X 15.15 X 15.35 INCHES (460 X 385 X 390 MM)

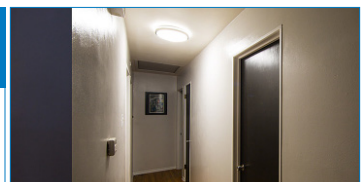

## ADDITIONAL INFORMATION

### INSTALLATION METHOD

FLUSH MOUNT - CEILING MOUNT

### FIXTURE COLOR/DIFFUSER

BRUSHED NICKEL/POLYSTYRENE

### CONTROL TYPE

TRIAC DIMMABLE


CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

**PRODUCT CODE: CM314-251BNPS4D**


**LED FLUSHMOUNT/14 INCH SPILL RING/LOW PROFILE**

**LUMINAIRE PHOTOMETRIC (TEST REPORT)**

**ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 1010LM**

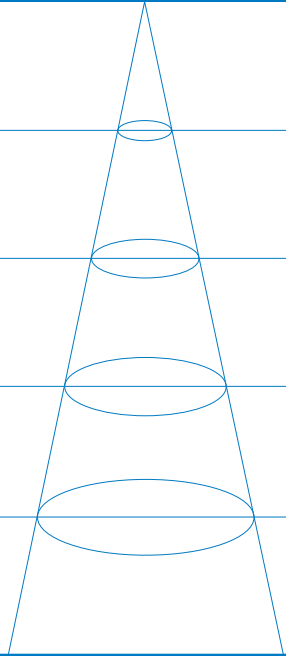3.281FT 1M	21.04, 50.43FC 226.5, 542.9LX		7.82FT 238.35CM
6.562FT 2M	5.260, 12.61FC 56.62, 135.7LX		15.64FT 476.70CM
9.843FT 3M	2.338, 5.604FC 25.16, 60.32LX		23.46FT 715.05CM
13.12FT 4M	1.315, 3.152FC 14.15, 33.93LX		31.28FT 953.40CM
16.4FT 5M	0.8416, 2.017FC 9.059, 21.71LX		39.1FT 1191.75CM
<b>HT</b>	<b>EAVG/EMAX</b>	<b>ANGLE: 100.00DEG</b>	<b>DIA</b>

**LUMINOUS INTENSITY DISTRIBUTION DIAGRAM**

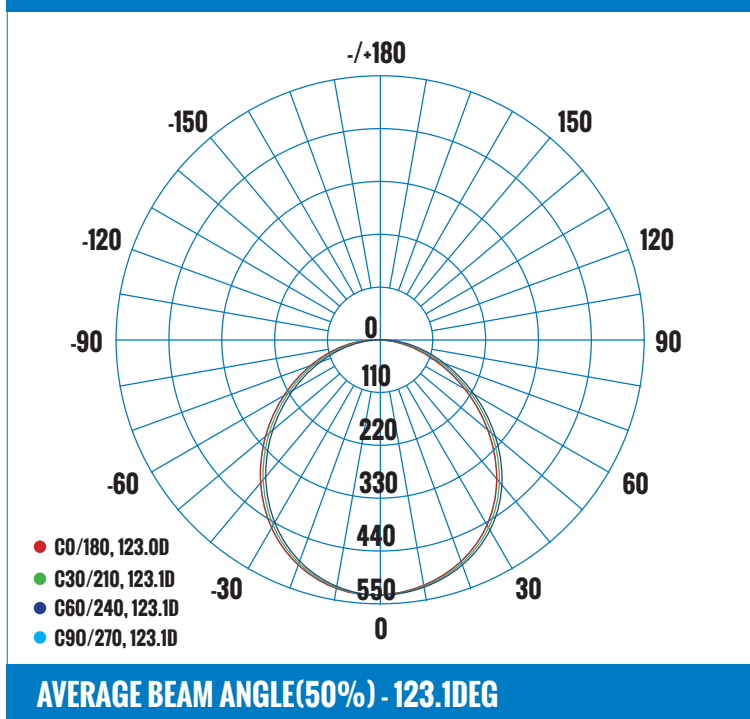

**CERTIFICATIONS**



**DRIVER/LED CHIP**



**ORDERING INFORMATION - CM SERIES**

SERIES	SIZE	WATTAGE	VOLTAGE	FINISH	DIFFUSER	COLOR TEMPERATURE		DIMMABLE
E.G. CM3	14	25	1	BN	PS	4		D
CM3 - CEILING MOUNT	14 - 14"	25 - 25W	1 - 120V	BN - BRUSHED NICKEL	PS - POLYSTYRENE	4 - 4000K	1700LM	D - TRIAC

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com