


ORDERING INFORMATION

Order code: 63096
 Description: LED/MR16/7W/40K/25/STD
 UPC: 069549630963
 Case quantity: 24

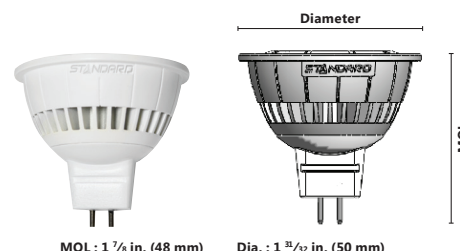

PERFORMANCE DATA

Shape: MR16
 Wattage (W): 7
 Base: GU5.3
 Lamp voltage (VAC): 12
 Colour temperature (K)**: 4 000
 Average life (L70 hours): 40 000
 Initial lumens (lm)*: 520
 Initial lumens per watt (lm/W): 74
 CBCP: N/A
 CRI: 80
 Beam angle: 25
 Power factor: ≥ 0.7
 Operating temperature range: -40°C/-40°F to 40°C/104°F

*Initial lumens range: +/- 5 %

**Typical colour temperature range: +/- 5 %



For a complete list of ENERGY STAR qualified products, please visit www.standardpro.com

CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of Electric Shock – Do not use where directly exposed to water or weather.
- Not for use in completely enclosed recessed fixtures.
- Suitable for use in damp locations.
- Added weight of the device may cause instability of a free - standing portable luminaire.
- Use only with a portable table lamp that is provided with a shade.
- Use in portable table lamps in which the distance from the bottom of the base to the top of the lampholder does not exceed three (3) times the minimum base diameter.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60 Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- 3 year limited warranty.
- For complete dimmer compatibility and warranty information visit www.standardpro.com.
- Operating temperature: -40°C/-104°F to 40°C/104°F.

NOTES: This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digital device. This product may cause interference with other devices. If interference occurs, change the location of the product. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment. This RFLD device complies with Canadian ICES-003. LED lamps must be stored, operated under suitable environmental conditions and in accordance with, but not limited to, the latest National Electrical Code, cETLus, cULus, CSA and ANSI specifications.