


# TECHNICAL INFORMATION BULLETIN

## LED RETROFIT LAMPS



### ORDERING INFORMATION

Order code: 61184  
 Description: LED/B10/5W/27K/120V/30M/D/E26/STD  
 UPC: 69549611849  
 Case quantity: 48

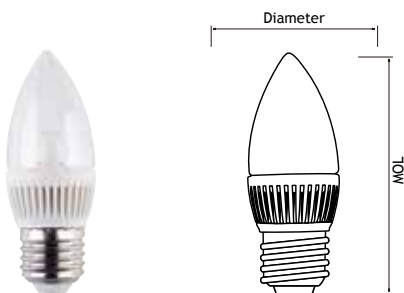

MOL = 3 13/16 in. (97 mm)  
 Dia. = 1 13/32 in. (36 mm)

### PERFORMANCE DATA

Initial lumens (lm)*:	260
Initial lumens per watt (lm/W):	52
Wattage (W):	5
Lamp voltage (VAC):	120
Colour temperature (K)**:	2 700
CRI:	80
Average life (hours):	30 000
Power factor:	0.6
Operating temperature range:	-20 °C/-4 °F to 50 °C/122 °F
Dimmable range:	10%-100%

\* Initial lumens range +/- 5%

\*\* Typical colour temperature range +/- 5%

Environment: Damp location



### COMPATIBLE DIMMER LIST

**LUTRON DIMMERS:** Adriani AY600; Commercial Systems QSG-6P, LP-RPM-4A-12; Diva DV-600, DVCL-153P; Home-works HW-RPM-4A-120, HxD-6ND; Interfaces PHPM-WBX; Radio Ra RRD-10ND; Stanza SZ-6ND; Lutron SZ-6ND, HxD-6ND, S-600PRWH, DV-600PR-WH, TG-600PR-WH, AY600P, Q600P, GL600, CN-600PHW, DV-603PG, S-600, S-600P, LG-600P, D-600PH, TT-300NLH, TG-603PG, DV-600PR-WH

**OTHER DIMMERS:** Ace 34050, 3027596 Leviton 6633-PL, 6684, 6631, IPI06-1LX Legrand DrRD4W

### CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of Electric Shock - Do not use where directly exposed to water or weather.
- Not for use in completely enclosed recessed fixtures.
- Suitable for use in damp locations.
- Added weight of the device may cause instability of a free - standing portable luminaire.
- Use only with a portable table lamp that is provided with a shade.
- Use in portable table lamps in which the distance from the bottom of the base to the top of the lampholder does not exceed three (3) times the minimum base diameter.
- Do not open - no user serviceable parts inside.
- Use only on 120 VAC, 60 Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- NOTE: This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digital device. This product may cause interference with other devices. If interference occurs, change the location of the product. Any changes or modifications not expressly approved by the manufacturer could void the users authority to operate the equipment.
- This RFLD device complies with Canadian ICES-003.
- LED lamps must be stored, operated under suitable environmental conditions and in accordance with, but not limited to, the latest National Electrical Code, cETLus, CSA and ANSI specifications.